




# OPTISPRAY® ROVINGS ADVANCED PACKAGING

## 3 doff high pallet to a 4 high configuration

- Saves you space
- Less material handling
- Reduces waste

### 4 High pallet dimensions:

- Height: 123cm
- Width: 114cm
- Length: 114cm

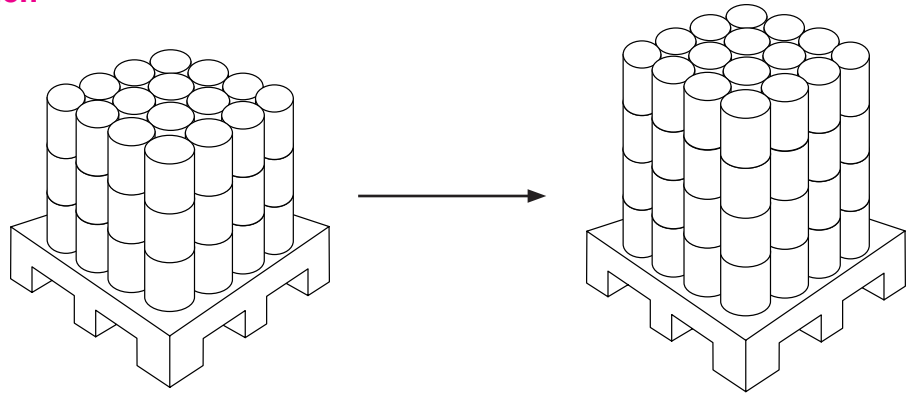

## Our 4 high pallet design

### 33% MORE

fiberglass in the standard 45in x 45in (114cm x 114cm) pallet footprint. Our new 4 high doff configuration increases the fiberglass material weight by nearly 700 pounds/pallet.


### 64 DOFFS/PALLET

The number of doffs per layer will remain the same at 16, in a 4 by 4 square with our 2-end run out.

### MORE LBS.

within your distribution center, manufacturing site, or tractor trailer with NO CHANGE to your current floor space.

## Updated packaging



### Structural honeycomb lid

Supports double stacking for static storage

### Board corners

Avoids pressure being placed on the doffs, preventing collapsing

### New Strap

Reinforces the additional layer of doffs

### MORE DOFFS

means reduced material handling and increased efficiencies.

### REDUCED PALLET TURNS ANNUALLY

Can save a half-day of saved time and labor over a year, so you can spend more time producing parts and less time re-splicing and moving pallets. Baseline for a 100,000 lb/year chop cell.

## The new 4 High configuration will be available in the 2400 and 3000 tex for both OptiSpray® (Roving) and OptiSpray® F (Roving).

The current configuration of 3 high pallets will remain available.

At Owens Corning, we remain committed to sustainability efforts. This not only applies to our products that are used within wind, transportation, and insulation, but also applies to reducing your packaging footprint. So... join us... and let's make the composites industry more productive, efficient and less wasteful.