



# Architectural Metal Insulated Roof Systems

## Architectural Metal Roofing Systems


The exceptional performance of architectural metal roofing makes it one of the most specified products in commercial roofing. Architectural metal roofing systems are energy efficient with various levels of solar reflectance and emittance depending on the heating or cooling needs of a given climate. Metal roofs are recyclable, lightweight and easy to install. They provide protection against extreme weather conditions. With strong corrosion resistance they offer long lasting durability, all of which equals sustainability. Metal roofs are aesthetically pleasing, versatile and cost efficient throughout their life cycle. They come in many colors and seam profiles including standing seam, curved, exposed fastener, concealed fastener, suitable for many applications including new and retrofit projects, and any type of commercial or residential projects

### FOAMULAR® THERMAPINK® Extruded Polystyrene (XPS) Rigid Insulation

FOAMULAR® THERMAPINK® XPS insulation is strong, lightweight and easily cut making it a perfect insulation choice for architectural metal roofing systems. THERMAPINK® 25 insulation has a 25 psi compressive strength that is strong enough to hold the retention clips used to secure the metal roofing system. Bearing plates under the clips seat into the surface of the insulation as they are tightened, and no adhered facer means no extra labor needed to trim the surface to achieve proper seating.

THERMAPINK® XPS insulation has high resistance to water absorption, and a stable long-term R value of 5 per inch. Since FOAMULAR® THERMAPINK® XPS insulation is highly water resistant it is easier to stage on job sites than products like polyisocyanurate and EPS that are more moisture sensitive and subject to restrictive storage and warranty rules. Also, with moderate perm ratings, and high, long-lasting R-value, THERMAPINK® insulation layers with sealed joints help limit the formation of condensation under metal roofing and help drain it away when it does form. Sealed joints and high water resistance also makes THERMAPINK® XPS insulation a temporary water shed while the job is awaiting final installation of the metal roof covering.

## Architectural Metal Roofing System

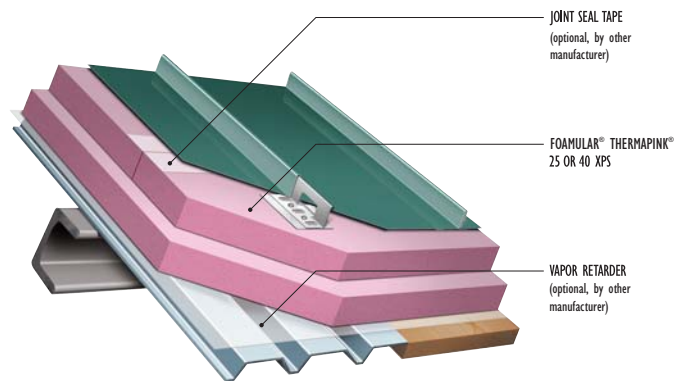

### XPS Direct-to-Deck Installation

FOAMULAR® THERMAPINK® XPS insulation in architectural metal roofing systems is approved for direct to deck installation, meaning no gypsum board thermal barrier layer is required between the structural steel roof deck and the insulation. See UL Roof Deck Construction No. 457, tested in accordance with ANSI/UL Standard 1256. (Not applicable when hourly ratings, ASTM E119, are needed for the roof assembly) Also, in architectural metal roofing THERMAPINK® XPS insulation is Class A fire rated, tested in accordance with ASTM E108.

### Notes

1. See actual warranty for complete details, limitations and requirements.



# Architectural Metal Insulated Roof Systems



#### Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein. Nothing contained in this bulletin shall be considered a recommendation.

GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit [ul.com/gg](http://ul.com/gg).

LEED is a registered trademark of the U.S. Green Building Council.



**OWENS CORNING INSULATING SYSTEMS, LLC**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO 43659  
**1-800-GET-PINK®**  
[www.owenscorning.com](http://www.owenscorning.com)

Pub No. 10019365. Printed in U.S.A. November 2014. THE PINK PANTHER™ & ©1964-2014 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2014 Owens Corning. All Rights Reserved.

