

Thermafiber® Mineral Wool Insulation- Formaldehyde Free

Helping you achieve LEED® Certifications



Owens Corning® offers a number of products to help improve thermal performance, moisture control, durability and sound quality in commercial buildings. This document applies to the LEED 2009 and LEED v4 for Building Design and Construction (BD + C), New Construction (Core and Shell, Schools, Retail, Data Centers, Warehouses and Distribution Centers, Hospitality, and Healthcare). As you pursue LEED® Certification, rely on the products and expertise of Owens Corning®.

LEED® Certification and the awarding of credits, is based on the overall project design, properly designed building systems and assemblies, and the performance of the project as a whole. Owens Corning® products can be a component of many of these systems and assemblies. All components within those systems and assemblies should be considered to assess compliance with the LEED® Rating System within a given category.

Owens Corning® Thermafiber® Mineral Wool Insulation- Formaldehyde Free Products contribute to the categories listed below.

Owens Corning® Thermafiber® Mineral Wool Insulation- Formaldehyde Free Products:

- Thermafiber® SAFB™ - FF
- Thermafiber® UltraBatt™ - FF
- Thermafiber® Fire & Sound Guard™ - FF

Table 1

Credit Category	LEED® v4 Requirement	LEED® 2009 Requirement	Owens Corning® Product Contribution
Energy and Atmosphere (EA)			
Minimum Energy Performance- Prerequisite 2:	Whole Building Energy Simulation Performance improvement or Prescriptive Compliance in accordance with ANSI/ ASHRAE/IESNA Standard 90.1-2010,	Whole Building Energy Simulation Performance improvement dependent on building type, baseline performance according to ANSI/ ASHRAE/IESNA Standard 90.1-2007, Appendix G.	Thermafiber® mineral wool insulation helps reduce building energy demand. Project team responsible for conducting energy analysis to determine the overall building energy efficiency.
Optimize Energy Performance	Whole Building Energy Simulation improvement beyond prerequisite or Prescriptive Compliance using ASHRAE 50% Advanced Energy Design.	Improved performance rating compared with baseline building performance rating per ANSI/ ASHRAE/IESNA Standard 90.1-2007, Appendix G.	Thermafiber® mineral wool insulation helps reduce building energy demand. Dependent on U-value of construction assembly. Project team responsible for conducting energy analysis to determine the overall building energy efficiency.
Materials & Resources (MR)			
Raw Material Source and Extraction Reporting	Sum of postconsumer recycled content plus ½ the pre-consumer recycled content, constitutes 25%, by cost, of the total value of the project. Products sourced within 100 miles (160 km) of project site valued at 200% of cost.	Sum of post-consumer recycled content plus ½ the pre-consumer content by cost, of the total value of the project. Products sourced within 500 miles of project site by cost, of the total materials value.	Thermafiber® manufacturing plants extract raw materials and manufacture products in close proximity to many projects. The products contain minimum 70% pre-consumer recycled content. Some products have higher content, so check with 1-800-GET-PINK®.
Building Product Disclosure and Optimization Material Ingredients	Products with chemical inventory to at least 0.1% (1000 ppm); have Declare, Cradle to Cradle (at least Bronze), or Cradle to Cradle Material Health Certification (Bronze or higher) and 90% of materials assessed by weight.	NA	Thermafiber® Mineral Wool Insulation- Formaldehyde Free products have Declare, and Cradle to Cradle Material Health Certification (Gold level).
Construction and Demolition Waste Management	Recycle and/or salvage nonhazardous construction and demolition materials. Diversion % of the total construction and demolition material; diverted materials include at least three material streams.	Use salvaged, refurbished or reused materials, which constitute at least 5% (1 point) or 10% (2 points), based on cost, of the total value of materials on the project.	Thermafiber® material can be removed from demolition projects and reused in new construction.


Continued next page

Table 1 (continued)

Credit Category	LEED® v4 Requirement	LEED® 2009 Requirement	Owens Corning® Product Contribution
Indoor Environmental Quality (EQ)			
Minimum Acoustic Performance Prerequisite 3:	For Classrooms < 20,000 cf materials with NRC of 0.70 or higher to be included in calculation. Or confirm rooms designed to meet reverberation time requirements as specified ANSI Standard S12.60-2010	Classrooms background noise from HVAC systems at 45 dBA or less, and reverberation times per ANSI Standard S12.60-2002, Acoustical Performance Criteria, Design Requirements and Guidelines for Schools.	Thermafiber® products absorb noise passing between floors and walls and provide STCs that improve the indoor environmental quality for building occupants.
Low Emitting Materials (EQ)	Achieve 100% threshold level of compliance with emissions and content standards for Ceilings, walls, thermal, and acoustic insulation per LEED Table 1.	Meet California Department of Health Services Standard Practice for the testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers, including 2004 Addenda.	Thermafiber® Mineral Wool Insulation Formaldehyde-Free is GREENGUARD Gold Certified, and is UL® Environment validated formaldehyde-free. Additional verification found at http://productguide.ulenvironment.com
Thermal Comfort	Design HVAC systems and building envelope to meet ASHRAE Standard 55-2010, Thermal Comfort Conditions for Human Occupancy with errata or a local equivalent.	Design HVAC systems and building envelope to meet the requirements of ASHRAE Standard 55-2004, Thermal Comfort Conditions for Human Occupancy. Design compliance in accordance with the Section 6.1.1.	Thermafiber® products contribute to a comfortable thermal environment.
Acoustic Performance	Design classrooms and other core learning spaces to meet the sound transmission class (STC) requirements of ANSI S12.60-2010 Part 1, or a local equivalent.	ANSI Standard S12.60-2002, Acoustical Performance Criteria, Design Requirements and Guidelines for Schools for STC rating of building shell, classroom and core learning space partitions; HVAC background noise at 40 dBA.	Thermafiber® products absorb noise passing between floors and walls and provide STCs that improve the indoor environmental quality for building occupants.
Mold Prevention	Credit requirements moved to "Thermal Comfort" credit.	Added to IEQ Credits 3.1, 7.1, and 7.2, HVAC systems/controls limit RH to 60% and IAQ program based on U.S. EPA document, Building Air Quality: A Guide for Building Owners and Facility Managers, EPA reference number 402-F-91-102, December 1991.	Thermafiber® products do not promote mold growth when tested in accordance with ASTM C1338. See individual product data sheets for details.

Note: No individual material enables a credit point to be taken within LEED® because each category is dependent on the aggregate of all materials and their proportionate relationship to the total dollar cost of all materials.

Figure 1 - Owens Corning® Thermafiber® Insulation Plant Locations

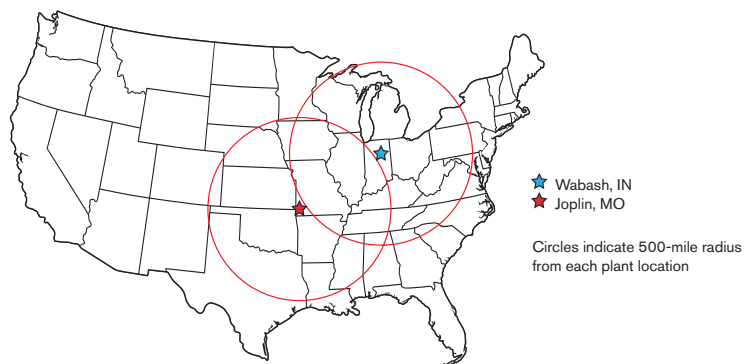

To view other Owens Corning® products that help contribute to LEED® certification please visit sustainability.owenscorning.com



OWENS CORNING INSULATING SYSTEMS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, 43659
1-800-GET-PINK®
www.owenscorning.com

THERMAFIBER, INC.
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, 43659
888-TFIBER1 [834-2371]
www.thermafiber.com