



# VentSure® RidgeCat® Rolled Ridge Vent




## Easy to install.

- Nail-gun friendly, double-density compression edge adds strength and provides excellent holding power
- 20-ft. roll lays flat when unrolled and flexes easily over the ridge
- Clear markings provided for nailing and centering over the ridge
- No end plugs required

## Easy to sell.

- **Breathable UV filter protects against wind-driven rain and helps prevent dust and insect infiltration**
- **Low-profile design and straight edge provide a sleek, finished appearance**
- **Net Free Vent Area (NFVA) of 300 sq. in./roll (15 sq. in./LF)**
- **VentSure® RidgeCat® Rolled Ridge vent complements the VentSure® InFlow® vent for a balanced system**

## Save time and limit roof deck penetrations

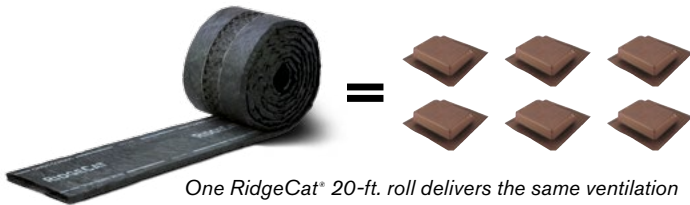

One RidgeCat® 20-ft. roll delivers the same ventilation as six standard, off-ridge vents.




Low profile design

# TOTAL PROTECTION. TOTAL CONFIDENCE.™

The most important part of the roof?  
All of them.



It takes more than just shingles to protect a home. It takes an integrated system of components and layers designed to withstand the forces of nature outside while controlling temperature and humidity inside. The Owens Corning® Total Protection Roofing System<sup>^</sup> gives your customers the assurance that all of their Owens Corning® roofing components are working together to help increase the performance of the roof — and to enhance the comfort and enjoyment of those who live beneath it.

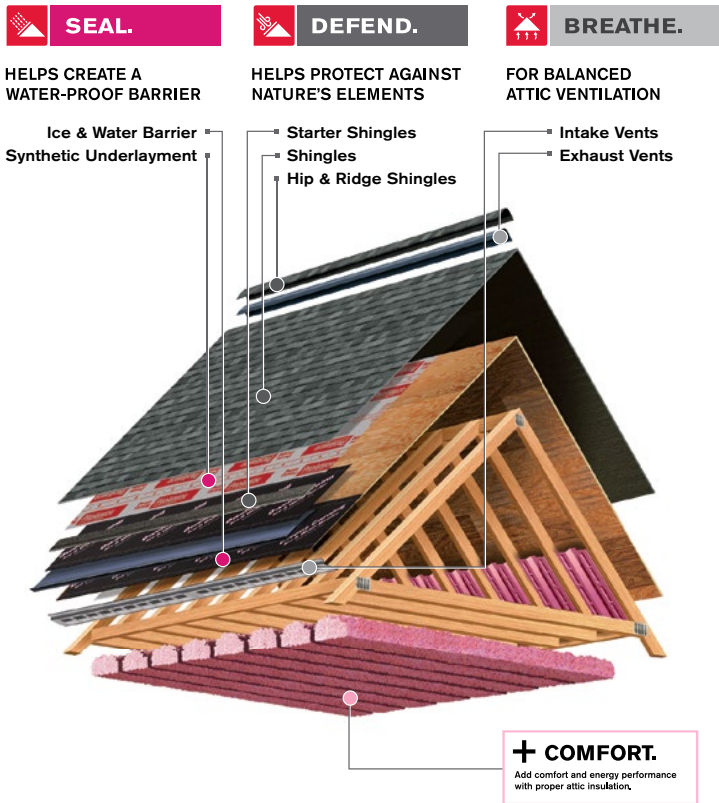

<sup>^</sup>Excludes non-Owens Corning® roofing products such as flashing, fasteners and wood decking.

**OWENS CORNING ROOFING AND ASPHALT, LLC**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, USA 43659  
**1-800-GET-PINK®**  
[www.owenscorning.com/roofing](http://www.owenscorning.com/roofing)



Pub. No. 10020721-A. Printed in U.S.A. June 2017.  
THE PINK PANTHER™ & © 1964–2017 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2017 Owens Corning. All Rights Reserved.

(All Plants)

## Product Specifications

Nominal Width	11 in.	9 in.	7 in.
Nominal Weight	3.6 lbs.	2.8 lbs.	2.4 lbs.
Net Free Vent Area (NFVA)	300 sq. in. per roll; 15 sq. in. per lineal ft.		
Nominal Length	20 ft.		
Nominal Height	5/8 in.		
Base Material	Nylon 6		
Allowable Roof Pitch	2:12 to 18:12		

## Applicable Standards and Codes

FBC — TAS100(A) Wind-Driven Rain up to 110 MPH<sup>†</sup>

Florida Product Approval<sup>†</sup>

ICC-ES AC132<sup>#</sup>


TDI Listed for Usage in Texas Coastal Regions<sup>†</sup>

UL ER21292-01

## Shipping Specifications

Name	Color	Material Code	Short Code	Unit	Rolls/Pallet	Pallets/Truckload	Rolls/Truckload
VentSure® RidgeCat® Roll Vent — 11" <sup>**</sup>	Black	796484	RCAT11	1 Roll	36	52	1,872
VentSure® RidgeCat® Roll Vent — 11" w/nails	Black	796485	RCAT11N	1 Roll	36	52	1,872
VentSure® RidgeCat® Roll Vent — 9"	Black	796487	RCAT9	1 Roll	45	52	2,340
VentSure® RidgeCat® Roll Vent — 7"	Black	796488	RCAT7	1 Roll	54	52	2,808

## Available Size

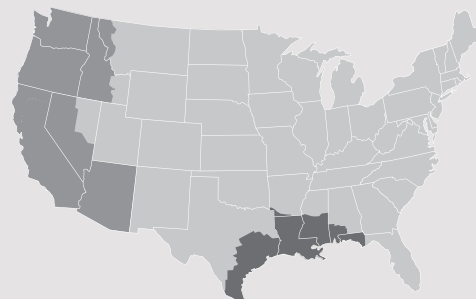

Light gray: 11 inch width

Medium gray: 7 & 9 inch width

Dark gray: Not available.

\* See actual warranty for complete details, limitations and requirements.

† Available in 11 inch width only.

# International Code Council Evaluation Services Acceptance Criteria for Attic Vents.

\*\* Available in certain regions.