




# DeckSeal™

SELF-ADHERED ROOFING SYSTEM  
FOR RESIDENTIAL LOW SLOPE

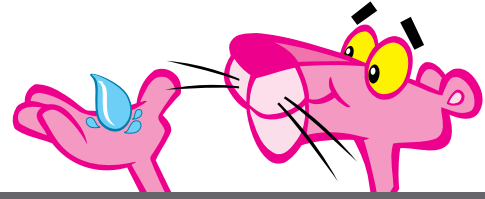

Owens Corning has applied its 75 years of building science technology to introduce the DeckSeal Self-Adhered (SA) Roofing System for residential low slope. DeckSeal roofing membranes deliver premium, durable system performance for many challenging low slope<sup>††</sup> applications, such as additions, garages and porches.

## Clean, Reliable, Friendly Installation

**Safe:** No kettles or torches are required for installation

**Clean:** None of the fumes and odors that accompany hot mop or solvent adhesive systems

**Convenient:** Can help reduce installation time versus conventional systems

**Proven:** SBS modified bitumen technology has decades of proven field experience

**Trusted:** Backed by Owens Corning, the industry's most trusted brand\* in residential roofing




## Six Attractive, Popular Colors




Brownwood<sup>†</sup>




Desert Tan<sup>†</sup>

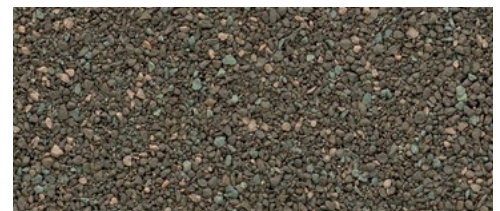

Driftwood<sup>†</sup>

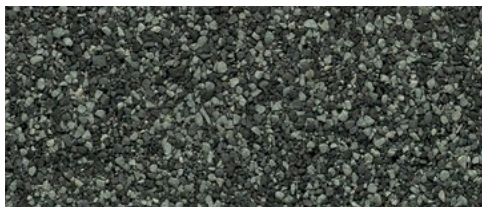

Estate Gray<sup>†</sup>

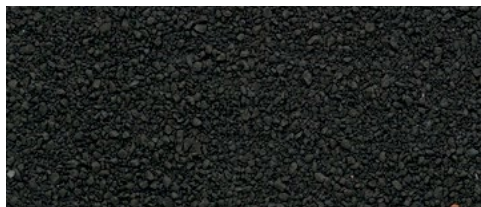

Onyx Black<sup>†</sup>




Shasta White<sup>†</sup>

# Why DeckSeal is the Preferred Choice

Features	Benefits
<ul style="list-style-type: none"> <li>A Dual Compound Formula to meet the performance needs of different layers:                             <ul style="list-style-type: none"> <li>* Top coat compound provides excellent granule adhesion</li> <li>* Back coat compound provides aggressive adhesion to the substrate</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Excellent adhesion, handling, and long term performance</li> <li>Excellent wind uplift characteristics</li> </ul>
<ul style="list-style-type: none"> <li>Granule-free adhesive seldge on both the side and end laps</li> </ul>	<ul style="list-style-type: none"> <li>Fast tack and reliable seam adhesion</li> </ul>
<ul style="list-style-type: none"> <li>Attractive colors that complement popular shingle offerings</li> </ul>	<ul style="list-style-type: none"> <li>Color coordinated roof elements to provide a "finished" look for the roof</li> </ul>
<ul style="list-style-type: none"> <li>Most trusted brand* in residential roofing</li> </ul>	<ul style="list-style-type: none"> <li>Peace of mind that Owens Corning offers warranties** on shingles and low slope roofing components</li> </ul>

## Example of 3 Ply System

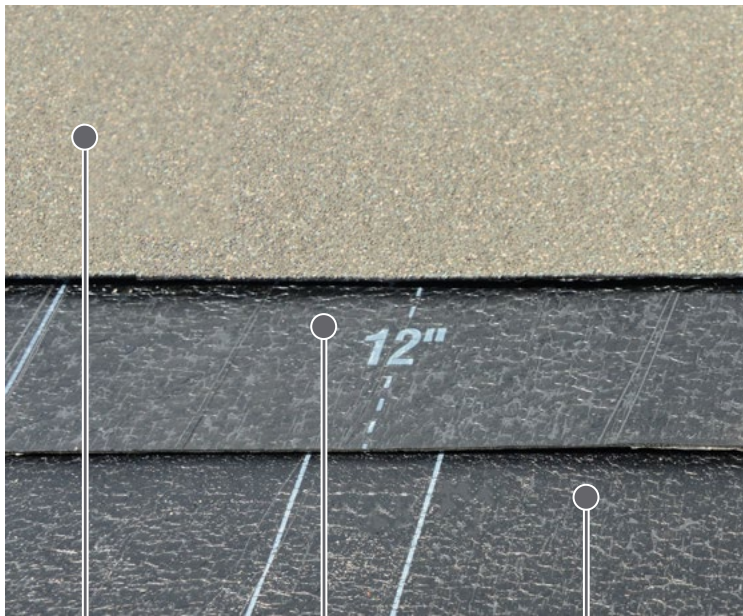

DeckSeal  
SA SBS Cap

DeckSeal  
SA Base/Ply

DeckSeal  
MA NailBase



**OWENS CORNING ROOFING AND ASPHALT, LLC**  
 ONE OWENS CORNING PARKWAY  
 TOLEDO, OHIO, USA 43659  
**1-800-GET-PINK®**  
[www.owenscorning.com/roofing](http://www.owenscorning.com/roofing)

Pub. No. 10020136-B. Printed in U.S.A. April 2018. THE PINK PANTHER™ & © 1964–2018 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2016 Owens Corning. All Rights Reserved.

(Brookville, Compton, Denver, Kearny, Medina, Minneapolis, Portland, Santa Clara, Summit,)

## Product Attributes

### Warranty Length\*\*

Limited warranty\*\*against material defects for up to 15 years

The versatile DeckSeal Roofing System can be applied as either a 2 or 3 ply system providing excellent protection to meet a range of customer needs.

Layer	2 Ply	2 Ply	3 Ply	3 Ply
3			DeckSeal SA SBS Cap	DeckSeal SA SBS Cap
2	DeckSeal SA SBS Cap	DeckSeal SA SBS Cap	DeckSeal SA Base/Ply	DeckSeal SA Base/Ply
1	DeckSeal MA NailBase	DeckSeal SA Base/Ply	DeckSeal MA NailBase	DeckSeal SA Base/Ply

## Product Specifications

### DeckSeal SA SBS Cap<sup>†</sup> (self-adhered)

Roll Dimension	32' 10" x 39 3/8" (10M x 1M)
Roll Thickness	130 mills (3.3 MM)
Roll weight	97 lbs. (44 kg.)
Roll Size (Nominal)	100 sq. ft.

### DeckSeal SA Base/Ply<sup>†</sup> (self-adhered)

Roll Dimension	65' 8" x 39 3/8" (20M x 1M)
Roll Thickness	80 mills (2.0 MM)
Roll weight	90.4 lbs. (41 kg.)
Roll Size (Nominal)	200 sq. ft.

### DeckSeal MA NailBase<sup>†</sup>

Roll Dimension	65' 8" x 39 3/8" (20M x 1M)
Roll Thickness	80 mills (2.0 MM)
Roll weight	101.4 lbs. (46 kg.)
Roll Size (Nominal)	200 sq. ft.

## Applicable Standards and Codes

UL Classified for use in Class A, B or C roofs as listed in the UL "Roof Materials And Systems Directory"

TDI Listed for Usage in Texas Coastal Regions

\* 2016 Roofing Homeowner Brand Awareness Survey by Owens Corning Roofing and Asphalt, LLC.

\*\* See actual warranty for complete details, limitations and requirements.

† Actual colors and granule blends may vary from the photo. We suggest that you view actual product on the roof to get a better idea of the finished color. Color availability subject to change without notice.

†† DeckSeal self-adhered roofing system components are designed to be installed on roof slopes between 1/4:12 to 2:12.

‡ Regionally available in fire-resistant (FR) versions. Visit [www.owenscorning.com](http://www.owenscorning.com) for product specification data sheets applicable to these products or contact 1-800-GET-PINK®.

